



## MULTI TIMER


*Patented Technology*

**16 CHANNELS  
WITH TIME SETTING**



**Multi Timer**

16 channel remote controller with timer option

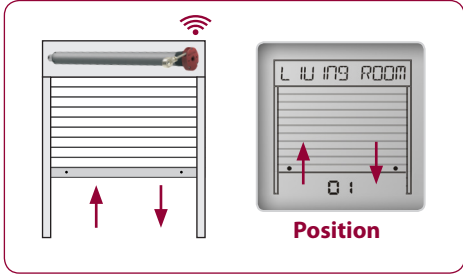


**Position**



Up

Stop

Down

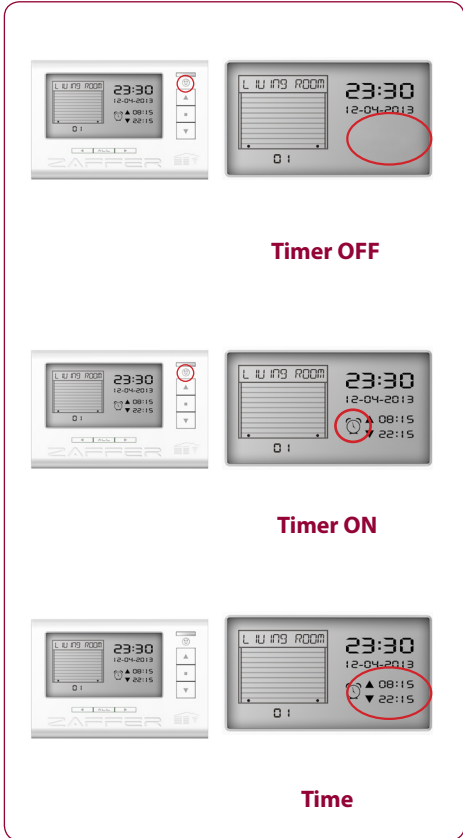

**Timer OFF**




Timer off / On

**Timer ON**



Timer On

**Time**



Up Time

Down Time



### Channel selection

Kanaal indicator op scherm.

*Indicateur de canal sur l'écran.*

Channel indicator displayed.





### Location

Weergave locatie rolluik op scherm.

*Location du volet indiquée sur l'écran.*

Shutter location displayed.





### All shutters

«Alle rolluiken» Toets voor globale bediening.

*Bouton «Tous volets» pour commande globale.*

«All shutters» button for global command.



### Low Battery

« Lage batterij » indicator.

*Indicateur de niveau « faible batterie ».*

« Low battery » indicator.

# Time zone setting

1

Download and instal zaffer soft from [www.zaffer.be](http://www.zaffer.be)  
Windows based PC. (Windows XP, Windows Vista, Windows 7)



2



USB



Please connect your device



**A. Date - Time**  
Updated from computer automatically

Date:	23-08-2012
Time:	16:27:55

**B. Time zone** (select from list)

Time zone:	(UTC+01:00) Brussel, Kopenhagen, Ma
------------	-------------------------------------

**C. Country** (select from list)

Country:	1 België
----------	----------

**D. City** (select from list)

City:	Brussels (Bruxelles)
-------	----------------------


# Changing shutter name



	Description
1	LIVING 1
2	LIVING 2
3	KITCHEN
4	BAYBY ROOM

To finish

Click send to device button



# Timer setting



A. **Shutter** select from list



B. **Week day** select from list




C. **Up time** ▲ type time HH-MM or select from list




D. **Down time** ▼ type time HH-MM or select from list



**Shutter with time setting have this icon**




E. **Clear :**



To Clear select empty line from list

F. **To finish** Click send to device button




# Pairing with the zaffer motor only for installer

1. Click




Paswoord vereist voor inbreng of aanpassing motornummers (alleen voor professionelen).  
Mot de passe requis pour encoder ou adapter des numéros de moteur (seulement pour professionnels).  
Password required for input and modification motor numbers (only for professionals).


2. Enter Password

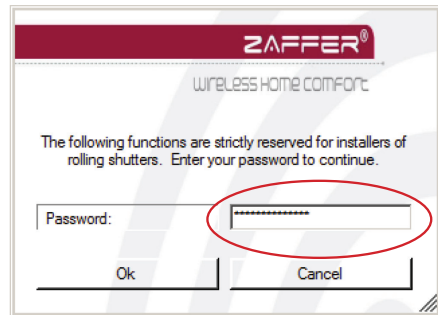

3. Motor number

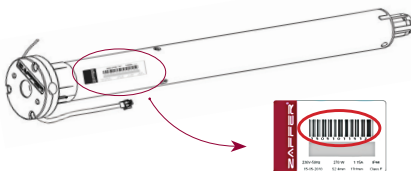



Enter motor number



4. To finish

Click send to device button



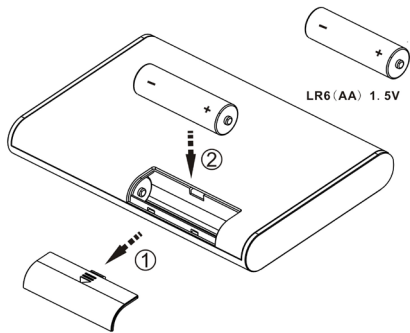

**CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS**



### CE Declaration of Conformity

ZAFFER B.v.b.a - Weiveldlaan 41 B-1930 Zaventem Belgium, declares that the product.


ONE, meet the essential requirements of the R&TTE directive 1999/5/EC for the intended use of the devices.

Note: A copy of the original declaration of conformity for each product can be requested from ZAFFER Bvba.



Power input : Power input : 1,5V dc with **2 X AA batt.**  
 Frequency : 433 MHz.  
 Working temperature : -20°C + 55°C  
 Radiated power : Estimated at approx. 1mW  
 IP : 40

Zaffer B.v.b.a reserves the right to modify its products without any notice.

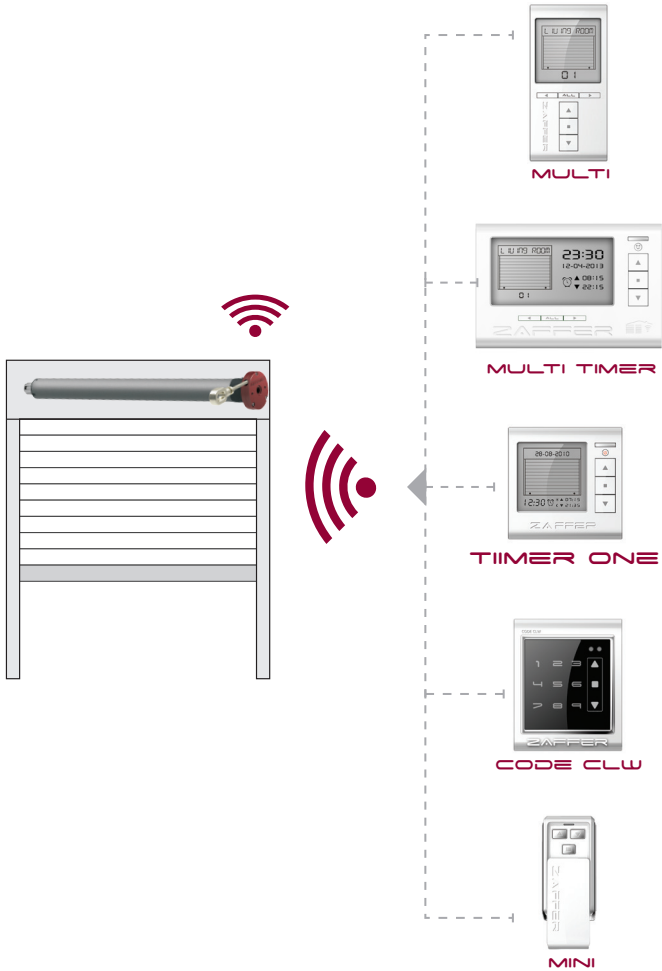

[www.zaffer.be](http://www.zaffer.be)