



# MULTI

Patented Technology

16 CHANNELS



### Channel selection

Kanaal indicator op scherm.

*Indicateur de canal sur l'écran.*

Channel indicator displayed.




### Location

Weergave locatie rolluik op scherm.

*Location du volet indiquée sur l'écran.*

Shutter location displayed.




### All shutters

«Alle rolluiken» Toets voor globale bediening.

*Bouton «Tous volets» pour commande globale.*

«All shutters» button for global command.



### Low Battery

« Lage batterij » indicator.

*Indicateur de niveau « faible batterie ».*

« Low battery » indicator.


## 1. User

- A Install zaffer soft, download from [www.zaffer.be](http://www.zaffer.be)



Please connect your device

- B

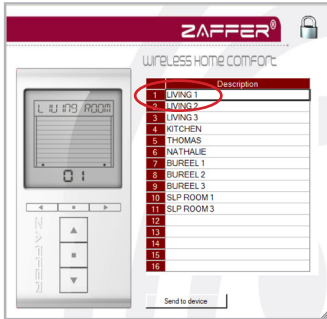

	Description
1	LIVING 1
2	LIVING 2

Beschrijving rolluik inbrengen (max 11 digits). Bevestigen door «Send to device».

Encoder le nom du volet (max 11 digits).

Confirmer par «Send to device».

## 2. Installer

- A



Click



Paswoord vereist voor inbreng of aanpassing motornummers (alleen voor professionelen).

*Mot de passe requis pour encoder ou adapter des numéros de moteur (seulement pour professionnels).*

Password required for input and modification motor numbers (only for professionals).

- B



Enter Pass word

- C



	Description	Motor number
1	LIVING 1	7010572349905





Type motor number from motor label  
**OR**


Delete motor number from Multi

Breng motor nummer in vermeld op motor label (13 nummers) en Bevestigen door «sent to device»

*Introduire le numéro de moteur indiqué sur l'étiquette moteur*

*(13 numerou) et confirmer par «sent to device»*

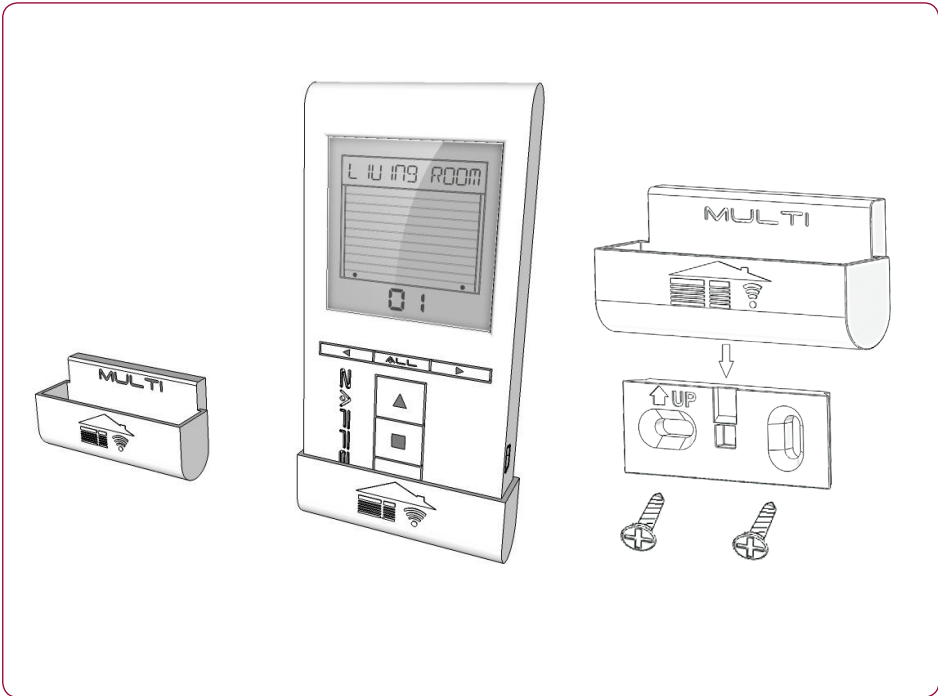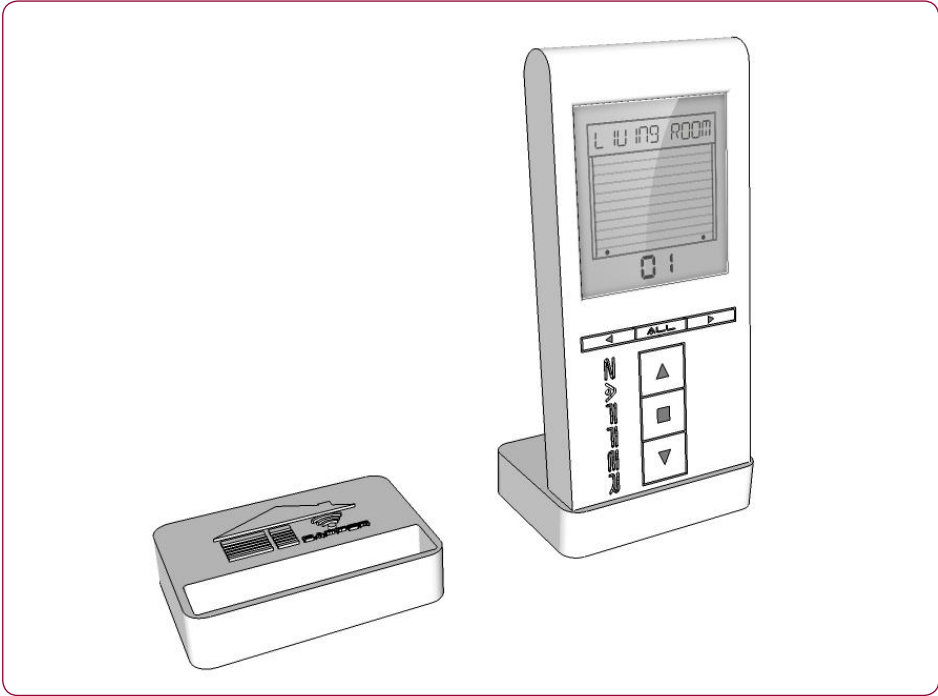

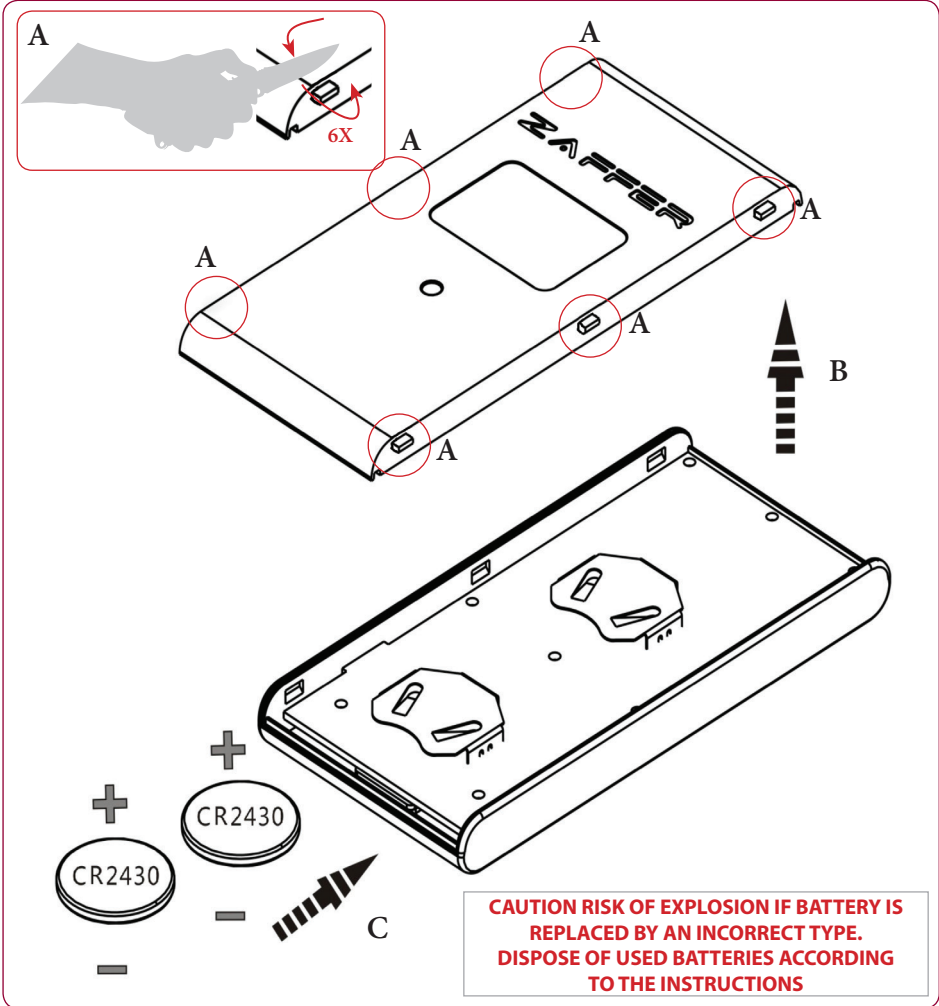

**CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS**


**CE Declaration of Conformity**

ZAFFER B.v.b.a - Weiveldlaan 41 B-1930 Zaventem Belgium, declares that the product. MULTI, meet the essential requirements of the R&TTE directive 1999/5/EC for the intended use of the devices.  
 Note: A copy of the original declaration of conformity for each product can be requested from ZAFFER Bvba.



Power input : 3V dc with **2 X CR2430 batt.**  
 Frequency : 433 MHz  
 Working temperature : -20°C + 55°C  
 Radiated power : Estimated at approx. 1mV  
 IP : 40

Zaffer B.v.b.a reserves the right to modify its products without any notice

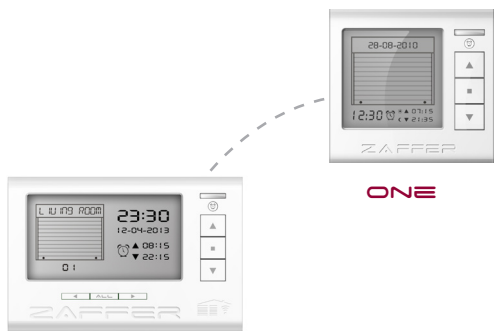

ONE


MULTI/TIMER



CODE CLW



MINI

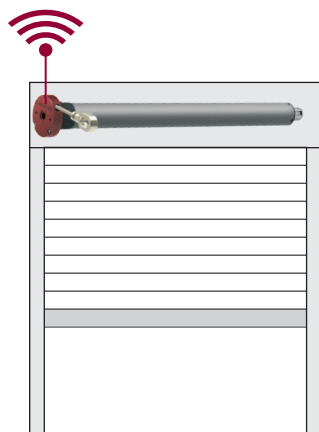

[www.zaffer.be](http://www.zaffer.be)